


Engineer - Install - Maintain



Sewage Gas



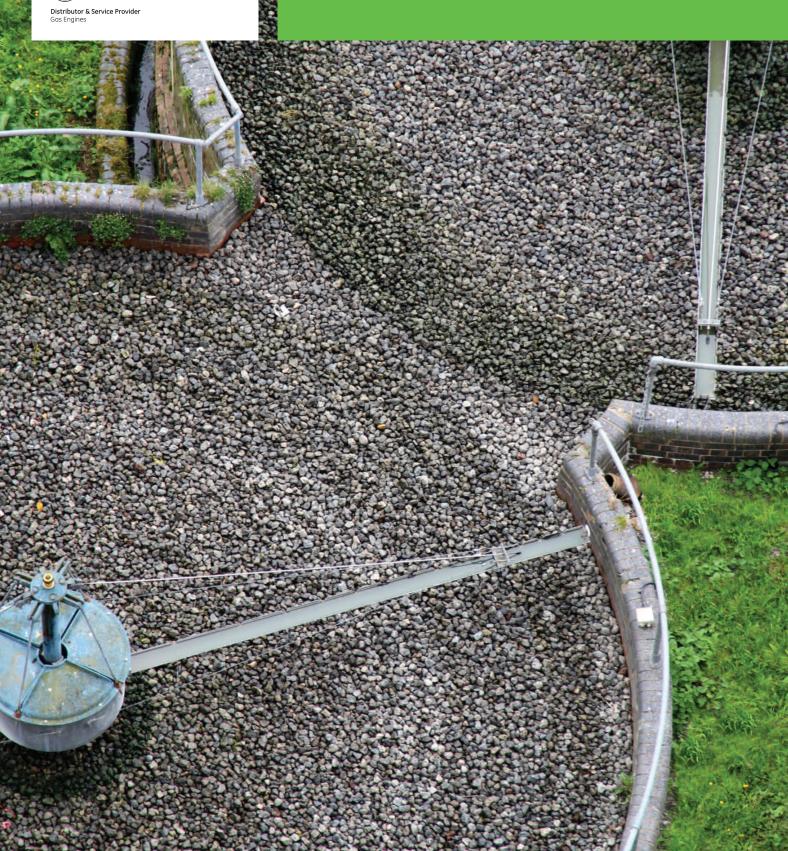

Sewage Gases

Clarke Energy is the authorised distributor and service partner for GE Energy's gas engine division in a growing number of countries across the world. In addition to providing high-efficiency, reliable gas engines we combine this with the expertise and resources to deliver unbeatable product support.

Whether your requirement is for the supply of a single gas engine generator or a complete turnkey power generation facility, we can meet that need. Our ability to add value by offering an end-to-end service, from initial proposal to reliable long-term maintenance, has led to us becoming a multi-national company with operations in ten countries across the globe. Our company prides itself on integrity, delivering only the highest quality products whilst providing a reliable accountable localised service.

Benefits of working with Clarke Energy

Clarke Energy provides flexible solutions for your gas generation projects. Our services range from the supply of a gas engine generator, through to the complete turnkey installation of a gas powered generation facility. Clarke Energy has a dedicated, top-quality team of sales, engineering, project management, commissioning and maintenance staff to meet your needs. We also offer long-term maintenance contracts backed up by a strong balance sheet, giving peace of mind with respect to the long-term performance of your GE gas generation equipment.


Sewage Gas to Renewable Power

Wastewater professionals once accepted the high costs of operating wastewater treatment facilities as a consequence of meeting their discharge permit requirements. As the cost of energy rises and emphasis on renewable energy increases, local authorities and municipalities are seeking solutions that save money and meet renewable requirements. GE Energy's Jenbacher gas engines provide a renewable energy solution that results in long-term savings for wastewater treatment plants (WWTPs).

Benefits of Sewage Digestion

- Generation of renewable energy from a waste material
- Reduction in carbon emissions especially compared to aerobic sewage treatment
- Economical onsite electrical power production & reduced transmission losses
- Production of soil improver
 Cost effective, proven
 - technology

Sewage Gas Schematic

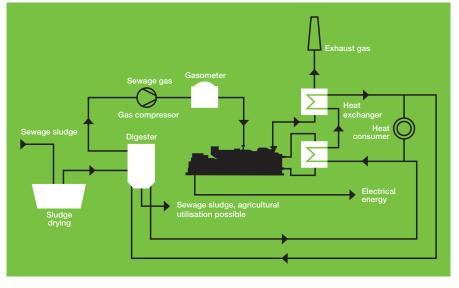

Reading, UK, sewage treatment works



Energy Costs

Waste treatment processes include energy-intensive operations such as aeration and pumping. As a result, WWTPs require significant energy consumption. As electrical prices increase, plant operators are facing higher energy costs in order to meet discharge permit requirements. The second leading expense to WWTP owners is the cost of energy, behind only personnel. For plants that employ anaerobic digestion for biosolids treatment, the process of combusting digester gas to produce electricity and heat may provide a solution to rising operational costs.

A large proportion of the world's sewage systems do not recover value from the sewage in the form of electricity and heat. But, the renewable energy fuel source derived from sewage gas can be converted using reciprocating gas engines, to electricity and heat, offsetting as much as two-thirds of a plant's electricity demand and eliminating the need to purchase fossil fuels for plant heating processes.

Conversion Steps from Sewage to Power

The process of biogas generation is divided into for steps:

- 1. Preparation of the input material including removal of physical contaminants
- Digestion (fermentation), consisting of hydrolysis, acetogenesis, acidogenesis and methanogenesis
- Conversion of the biogas to renewable electricity and useful heat
- 4. Post treatment of the digestate

Sewage is collected in municipal sewage systems and sent to the waste water treatment plant. From here it is prepared and sent to the sewage digesters.

In the digestion tanks a series of biological processes are harnessed in order to produce biogas. Hydrolysis is the process where the organic material is solubilised into the digestion liquid. It then undergoes the intermediate steps of acidogenesis and acetogenesis which create the precursor molecules for methanogenesis. Methanogens feed off these precursors and produce methane as a cellular waste product.

The biogas containing this biologically-derived methane is contained and captured in a gas storage tank which is typically located separately to the main digester. The gas storage tank acts as a buffer in order to balance fluctuations in the production of gas in the digesters.

Where gas production levels are low or highly variable, dual fuel mixing can be used to supplement the sewage gas with natural gas from the mains distribution network.

Advantages

Seamless dual fuel mixing maximises renewable energy output and smoothens gas production fluctuations by supplementing with natural gas as required.

High electrical efficiencies help generate more electricity per unit of sewage gas used. Electrical efficiencies of up to 43% based upon the lower heating value of the gas are achieved with GE Jenbacher gas engines.

LEANOX controls with turbocharger bypass ensures the correct air-togas ratio under all operating conditions to minimise exhaust gas emissions while maintaining stable operation.

Longer overhaul schedule minimise maintenance costs with 60,000 operating hour overhaul intervals.

Our competence

Clarke Energy has extensive experience in the engineering, installation and maintenance of generation facilities operating on sewage gas and other gases derived from biological sources.

The GE Jenbacher gas engine is known for having the highest levels of electrical efficiency on the market. When coupled with a contractual maintenance agreement with Clarke Energy, it will give peace of mind to our customers that they will achieve the highest levels availability and hence consistent returns from their biogas plant.

Beddington, UK, 1 x JGMC312



Mapocho, Chile, 3 x JMS620



Algeria

33 bis, rue des Pins Hydra, Alger, Algérie Tel. +213 2160 88 86 Fax. +213 2169 35 01 algeria@clarke-energy.com

Australia

Building 1 2-4 Stirling Street Thebarton South Australia 5031 Adelaide Australia Tel. +61(0)8 8290 2100 Fax. +61(0)8 8443 5848 australia@clarke-energy.com

Bangladesh

Lotus Kamal Tower TWO Level -16 59 & 61, Gulshan South Avenue Gulshan-1 Dhaka-1212, Bangladesh Tel. +88-02-9841638 9857355 9898837 Fax. +88-02-8826530 bangladesh@clarke-energy.com

France

Z. A. de la Malle RD6 Bouc Bel Air 13320 France Tel. +33 (0)4 42 90 75 75 Fax. +33 (0)4 42 90 75 76 france@clarke-energy.com

India

Shivkiran, Plot No. 160 CTS No. 632 Lane No.4 Dahanukar Colony Kothrud Pune 411038 India Tel. +91 20 30241777 Fax. +91 20 30241800 india@clarke-energy.com

Ireland

Unit 7 Newtown Business Park Newtownmountkennedy County Wicklow Ireland Tel. +353 (0)1 281 0010 Fax. +353 (0)1 281 0520 ireland@clarke-energy.com

New Zealand

Unit 5 56 Pavilion Drive Airpark II Mangere Auckland 2022 New Zealand Tel. +64 (9) 256 9910 Fax. +64 (9) 256 9912 newzealand@clarke-energy.com

Nigeria

28, Joel Ogunnaike Street GRA Ikeja Lagos Nigeria Tel. +234 (0)181 567 23 nigeria@clarke-energy.com

South Africa Botswana Mozambique

PO Box 1535 Link Hills 3652 KwaZulu-Natal South Africa Tel. +27 31 763 3222 Fax. +27 31 763 3041 southafrica@clarke-energy.com

Tanzania

Regus Centre 7th Floor Amani Place Ohio Street, PO Box 38568 Dar es Salaam Tanzania Tel. +255 (0) 222 196817 tanzania@clarke-energy.com

Tunisia

Immeuble Saray 1er étage – Bureau n°B.2 Les Berges du Lac 1053 Tunis, Tunisie Tel. +216 (0)71 65 50 62 Fax. +216 (0)71 65 50 59 tunisia@clarke-energy.com

UK Head Office

Power House Senator Point South Boundary Road Knowsley Industrial Park Liverpool L33 7RR United Kingdom Tel. +44 (0)151 546 4446 Fax. +44 (0)151 546 4447 uk@clarke-energy.com

